




Nu-Deck Sealer

Urethane Acrylic
Colored Deck Sealer

Product Information

Copyright © TEXAS CEMENT PRODUCTS, INC.

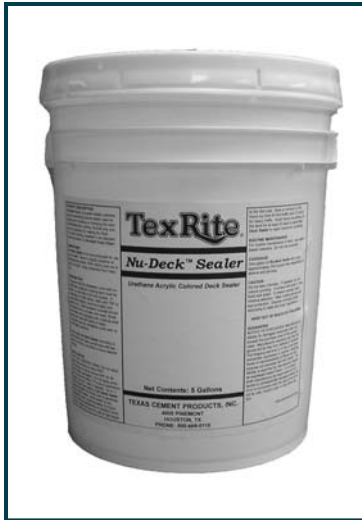

STIR WELL BEFORE USING

Nu-Deck SEALER is a water based, urethane acrylic penetrating colored sealer used for sealing, renewing or changing the color of **Nu-Deck** deck coating. It is available in six standard colors as shown on the **Nu-Deck Color Chart**.

ond coat should be applied within two hours of the first coat reaching a completely dry condition.

Allow a minimum of 24 hours dry time for foot traffic and 72 hours for heavy traffic. Avoid heavy scrubbing on the deck for at least 20 days to allow **Nu-Deck Sealer** to reach maximum durability.

ROUTINE MAINTENANCE

For routine maintenance of deck, use water-based cleaners. Do not use solvents.

COVERAGE

One gallon of **Nu-Deck Sealer** will cover approximately 200-250 square feet depending on the texture and porosity of the surface being sealed.

STORAGE LIFE

One year if kept in sealed container. Protect from freezing.

LIMITATIONS

Nu-Deck SEALER is not recommended as a sealer over any other substrate except the cement based **Nu-Deck COATING**. Do not use **Nu-Deck SEALER** directly over concrete or any other decking system as the material composition of other systems may not be compatible. **Nu-Deck SEALER** is not recommended for use under water. Store in original container at temperatures below 100°F (40°C) and out of direct sunlight. Keep containers from freezing.

PACKAGING

COLOR: Six standard colors available.
TEXTURE: Free flowing liquid
PACKAGING: 5 gallon pails

PREPARATION

The cement based **Nu-Deck COATING** must be allowed to dry a minimum of 2 - 4 hours prior to the application of **Nu-Deck SEALER**. Existing **Nu-Deck** must be clean, dry and free of dirt and grease. If necessary on older decks, clean with TSP or a concrete cleaner, rinse thoroughly and allow to dry.

Note: Apply **Nu-Deck SEALER** according to instructions on a small test area with two hours minimum cure time after the final coat to insure desired results.

APPLICATION

STIR WELL BEFORE USING.

Do not apply when temperature is below 50°F. Temperature must be above 50°F for 48 hours after application. Do not apply when rain is eminent within 72 hours of application of the second coat.

Up to 1-pint of water per gallon of **Nu-Deck Sealer** may be added to the first coat to make it easier for the sealer to penetrate the surface. Apply by brush, roller or sprayer. Allow sealer to completely dry between coats (Approximately 2-4 hours. Drying time will vary depending on ambient conditions.). The second coat shall be applied full strength (undiluted) and at a right angle to the first coat. The sec

Guarantee - The recommendations, suggestions, statements and technical data in this bulletin are based on our best knowledge. They are given for informational purposes only and without any responsibility for their use. The responsibility of the seller and manufacturer is only to replace that portion of the product of this manufacturer which proves to be defective due to the quality of the ingredients or the manufacturing process itself. However since handling and use is beyond our control, we do not guarantee the results to be obtained. Only written statements signed by an officer of the manufacturer are binding on the manufacturer or seller. Nothing in this bulletin should be interpreted as a recommendation for a use which violates any patent rights.

CAUTION

Do not take internally. If ingested, do not induce vomiting. If contact with eyes or skin, flush with water. If irritation persists, seek medical attention. Wear rubber gloves and eye protection. Dispose of empty container according to state and local regulations.

KEEP OUT OF REACH OF CHILDREN

Nu-Deck Sealer



TEXAS CEMENT PRODUCTS, INC.

4000 Pinemont
Houston, Texas 77018 USA

Phone: 713-682-8411
Toll Free: 800-669-0115
Fax: 713-688-2448

DSNUDECKSER081209